

4" PRIME ASSISTED

Solids Handling Pump

Our 4" solids handling jet pump is designed for high flows to 1,360 gpm and heads to 330 feet. Our quick self-priming pump eliminates the need for a waste hose and the need to fill up the pump housing with water to obtain prime. It also prevents discharge of pumping effluent onto the ground.



*Photos are representational; actual products vary. Additional product plans and specifications may vary from those shown and are subject to in-stock availability.

Features

John Deere 4024TF281-49 engine
Fully automatic, dry priming to 28 feet
High head to 132 feet
Maximum flows to 1200 gpm
Solids handling to 3"

Specifications

Fuel tank capacity: 55 US Gallons
Fuel consumption: 1.68 gph @ 2,200 rpm
Maximum operating speed: 2,200 rpm
Maximum operating temperature: 200 degrees F
Maximum working pressure: 60 psi
Maximum suction lift: 28 feet
Impeller: 8.25" diameter

Engine Specifications

Engine: John Deere 4024T, 37hp@ 2,000 rpm
Type: 4-cylinder, in-line, 4-cycle, direct-injected turbo-charged, Interim Tier IV diesel
Displacement: 275 cubic inches
Fuel Economy:
+ .392 lb/hp-hr @ 2200 rpm
+ .386 lb/hp-hr @ 2000 rpm
+ .381 lb/hp-hr @ 1800 rpm
Maximum operating time:
+ 32 hours @ 2,200 rpm
+ 39 hours @ 2,000 rpm
+ 50 hours @ 1,800 rpm

Vacuum Pump Specifications

Vacuum pump: Dry, rotary claw, air cooled, oil less, direct drive (5.4 hp)
Casing: 30 cast iron
Maximum operating temperature: 200 degrees F
Maximum working pressure: 15 psi
Maximum suction lift: 28 feet
Air handling capacity: 97 SCFM

Construction

Pump casing: Heavy duty Class 30 cast iron
Impeller: Dynamically balanced, non-clogging, enclosed, CD4MCu, with rear-equalizing vanes to reduce axial loading and prolong seal and bearing life.


Mechanical Seal: 2.5" run-dry, grease lubricated with Tungsten Carbide rotating and Silicon Carbide stationary seal faces. Single inside mounted, non-pusher type with self-adjusting elastomeric bellows. All other components are 304 stainless steel and viton.

Head: back pull out design, heavy-duty class 30 cast iron with tapered bore design

Bearing and Frame: 30 cast iron, heavy duty grease lubricated

Shaft: 17-4 pH stainless steel fitted with renewable 416 stainless steel sleeve.

4" Pump Performance Curve

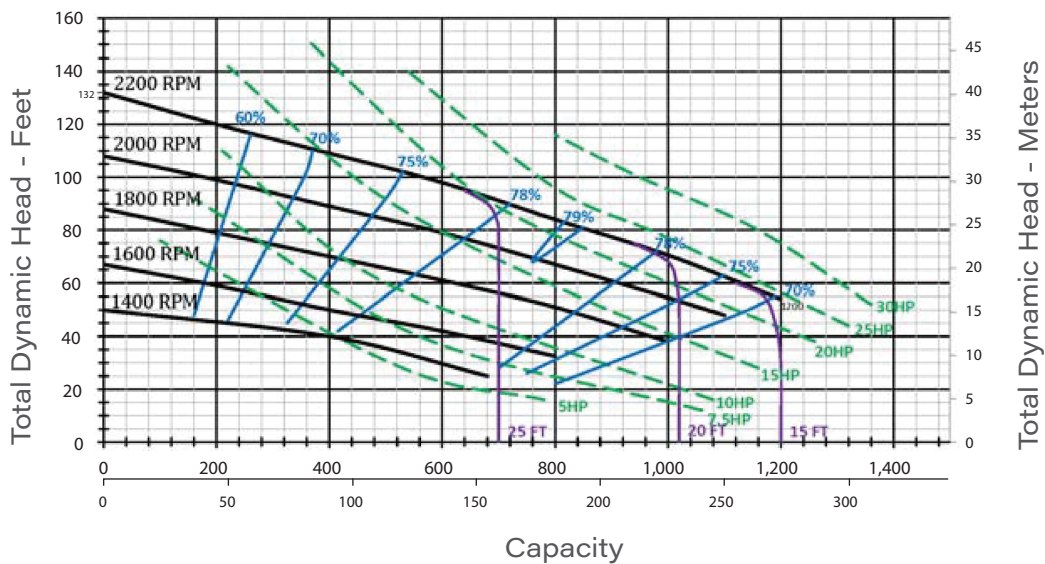

*Some details not shown in all views. Overall dimensions are normal.

*Photos are representational; actual products vary. Additional product plans and specifications may vary from those shown and are subject to in-stock availability.